RES-260-262

TECHNICAL SHEET

Electronic wall mounted mixer faucet AKWATIC All-in-One

Description


Wall mounted touch-free faucet operated by infrared sensor with mixer handle for cold and hot water. Solenoid valve, sensor and battery are integrated in the spout.


Highly durable for high traffic areas. The faucet is designed for an easy installation and maintenance. Electronic faucets preserve water, saves on energy and optimizes on sanitary hygiene.

Technical characteristics

- Self adjusting infrared sensor or settings adjustable by remote control (sensor range, flow time, hygiene rinse, temporary off, security time, reset...).
- Security stop after 90 seconds without interruption.
- Heavy-duty brass body, chromed finish.
- Concealed brass body with F1/2" water inlets.
- Powered by internal battery 9 V.
- Low energy consumption, batteries last around 3 years.
- Sensor features a low battery level indicator.
- Internal solenoid valve.
- Operating pressure: 0.3 8.0 bars.
- Water temperature max. 70°C.
- Aerator NEOPERL adjustable to optimize the jet direction, with flow rate 6 LPM (on demand 3 LPM, 1,9 LPM or 1,3 LPM). Anti-limescale protection.
- Sensor, battery and solenoid valve are inside the body, servicing can be done from the front.
- Limited warranty 3 years. CE.

RES-260 recessed version, battery

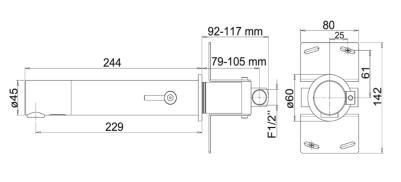




- RES-260 9V battery
- □ **RES-262** 9V transformer

Options:

- Remote control RES-31
- Limited flow rate 1.3, 1.9 or 3 LPM
- Brushed, matt black, matt gold finish (contact us)
- 24 hours hygiene rinse
- Matching soap dispenser design
- Integrated on washbasin wall support frame
- Elongated mixer handle for PRM
- Transformer multiple up to 10 faucets



RES-262 recessed version, transformer



SUPRATECH